


Endurance | TWK3530

High Density, Unmatched Throughput

FOR HP45A TECHNOLOGY

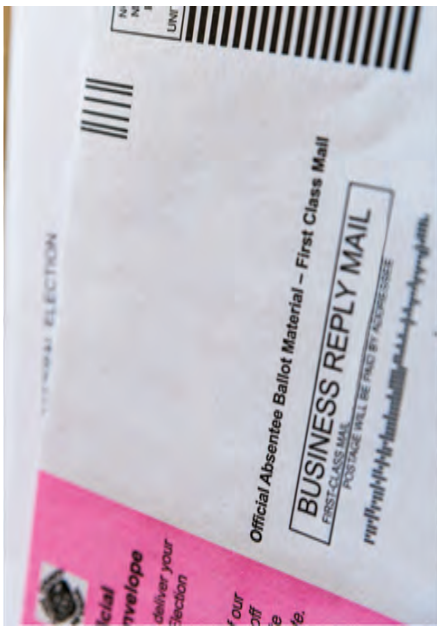

NON-CMR, PFAS-FREE

Endurance is an aqueous black ink for HP45A technology producing a high density impression and is recommended for high throughput / bulk applications.



ENDURANCE | TWK3530

FOR HP45A

Performance Data

Optical Density

Decap Time

Smudge Resistance


Light Fastness

Water Fastness

Technical Specifications

Ink Type	Aqueous
Color	Black ■
Colorant	Hybrid
Firing Parameters	Voltage: 10.2V Pulse: 2.2µs
Pulse Warning	On - 40°C
Open Time	~1hr
Shelf Life	24mo from MFG
Bulk Use	Recommended
Storage Conditions	10°C ~ 30°C
Operating Conditions	10°C ~ 40°C
Maintenance	Gently wipe printhead with a dry, lint-free cloth
Downtime	<1 day down: leave cartridges in printer, wipe and purge before next use. >1 day down: remove cartridges from machine and seal with cartridge clip. Wipe and purge before next use.

Note: Performance results dependant on individual application e.g. substrate, environment, orientation.

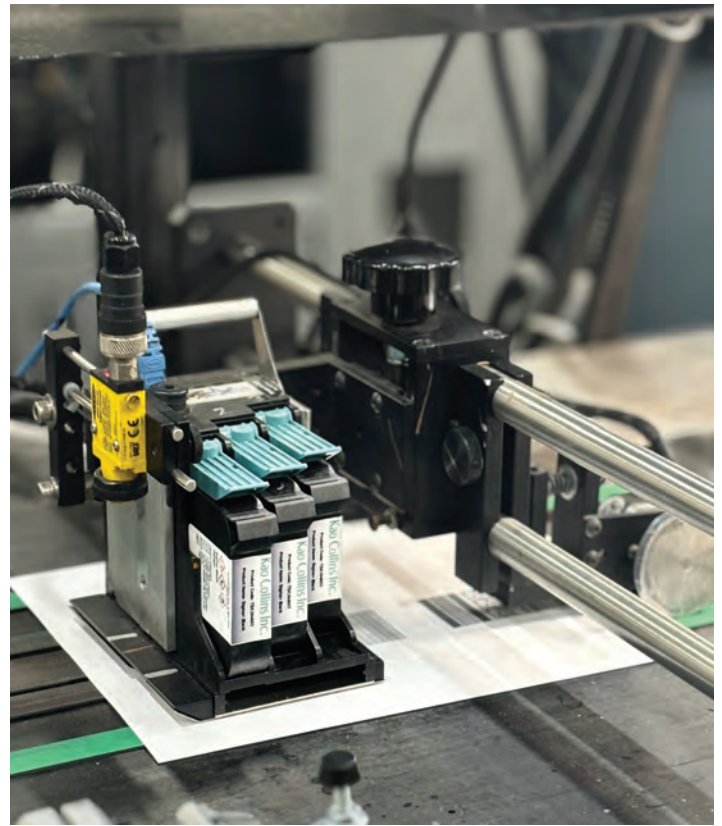

Target Applications

Marking and Coding

Packaging

Mailing

For Porous Media

Uncoated Paper

Envelopes

Copy

Mill Finishes

Matte

Dull

Corrugate

Regulatory Compliance

EuPIA

PFAS Free

Non-CMR

REACH SVHC

